




TAMAÑOS	SERIES TODAS				SERIE 300		SERIE 600		SERIE 1200	
	$\varnothing A$ mm	$\varnothing O$ mm	$\varnothing Q$ mm	A mm	B mm	M mm	B mm	M mm	B mm	M mm
1 al 6	114	48	180	76	155	420	250	505	470	710
7 al 9	168	73	230	76	170	440	250	520	440	720
10 al 13	219	89	290	76	190	460	280	550	510	780
14 al 16	219	89	295	160	210	520	320	630	590	900
17	273	114	350	102	310	630	450	770	790	1110
18	273	114	350	102	350	710	500	850	890	1250
19 y 20	324	141	418	150	480	960	700	1180	1200	1680
21	406	141	500	150	480	1030	700	1250	1200	1750
22	406	141	500	150	210	1190	810	1400	1400	1990

El valor cota M da la altura de montaje mínima, para movimientos del Caño ascendente, para descendente sumar el Desplazamiento del Caño.

Ajuste posible de la Serie 300 +25 mm, para las otras+50 mm

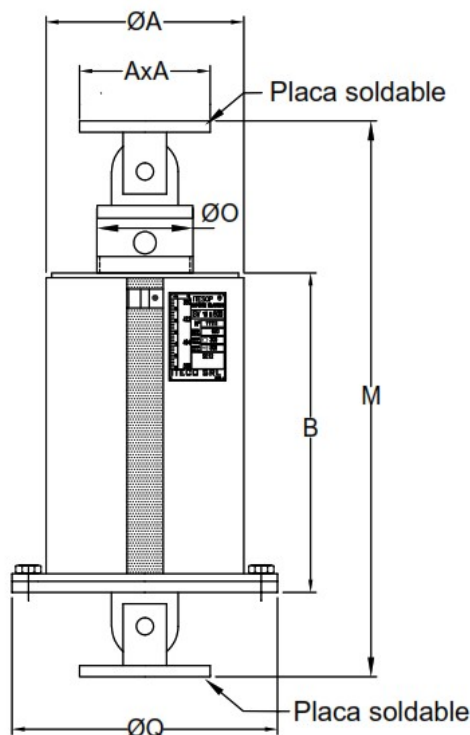